



CAT. 57055-M

IEC60320 C-13 CONNECTOR, (ACCEPTS 12/3 AWG, CONDUCTORS), CORD GRIP RANGE .360-.655, BLACK, 15A-125V / 10A-250V, 2 POLE 3 WIRE. UL/CSA.

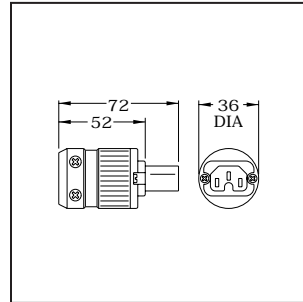


CAT. 57050-M

IEC60320 C-15/C-13 CONNECTOR, (ACCEPTS 12/3 AWG CONDUCTORS), CORD GRIP RANGE .360-.655, BLACK, 15A-125V/10A-250V, 2 POLE 3 WIRE. UL/CSA.

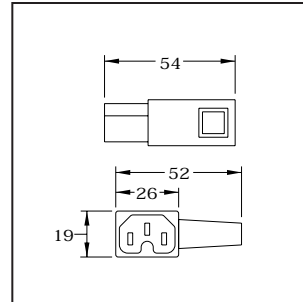


CAT.57075 (LEFT ANGLE)

IEC60320 C-15/13 CONNECTOR, LEFT ANGLE CORD GRIP, (ACCEPTS 16/3 AWG, 1.5mm² CONDUCTORS), MAX. EXTERNAL STRAIN RELIEF = 7mm DIA. (0.276) BLACK, 2 POLE 3 WIRE. (15A-250V-UL/CSA), (10A-250V VDE)

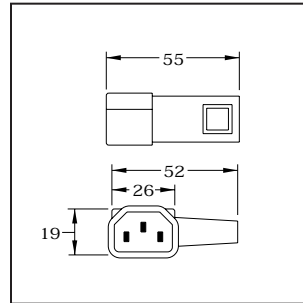

CAT. 57045 (LEFT ANGLE)

IEC60320/C-14 PLUG, LEFT ANGLE CORD GRIP, (ACCEPTS 16/3 AWG, 1.5mm² CONDUCTORS), MAX. EXTERNAL STRAIN RELIEF = 7mm DIA. (0.276), BLACK, 2 POLE 3 WIRE. (15A-250V-UL/CSA), (10A-250V VDE)

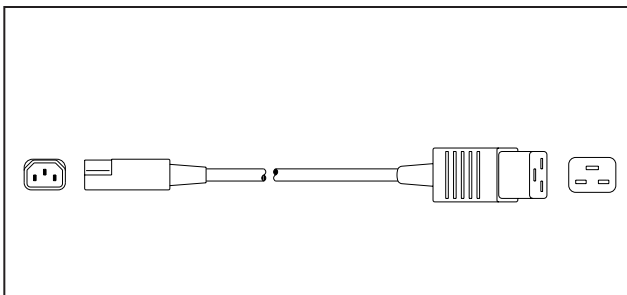

CAT. 30700

ADAPTER, IEC 60320 C-14 PLUG TO IEC 60320 C-19 CONNECTOR, 15A-250V, 12 INCH LONG, BLACK.

- CAT. 30700X1M 1 METER LONG (3'3")
- CAT. 30700X1.5M 1.5 METERS LONG (4'9")
- CAT. 30700X2M 2 METERS LONG (6'7")
- CAT. 30700X2.5M 2.5 METERS LONG (8'2")
- CAT. 30700X10FT 3.1 METERS LONG (10')