

CAT. No.

74900

UNIVERSAL MULTI-CONFIGURATION 20 AMPERE 250 VOLT EUROPEAN, UK, BRITISH, DENMARK, SWISS, AUSTRALIA, CHINA, JAPAN, BRAZIL, ARGENTINA, AMERICAN (NEMA), S. AMERICAN, ASIA, THAILAND, ISRAEL, INTERNATIONAL POWER OUTLET, 36mmX36mm SIZE, SHUTTERED CONTACTS, 2 POLE-3 WIRE GROUNDING (2P+E). IVORY.

CERTIFICATIONS

REACH ROHS ROHS3 CE

STANDARDS


UNIVERSAL EUROPEAN INTERNATIONAL NEMA

PAGE 1 OF 4


ALL DIMENSIONS ARE IN MILLIMETERS

RELATED PRODUCTS:

<u>CATALOG No.</u>	<u>DESCRIPTION</u>
74970-W	PANEL MOUNT FRAME (SNAP-IN), 1 OUTLET, IVORY
74930	PANEL MOUNT FRAME (SCREW MOUNT), 1 OUTLET, IVORY
74940	PANEL MOUNT FRAME (SCREW MOUNT), 2 OUTLETS, IVORY
74950	SURFACE MOUNT FRAME (SCREW MOUNT), 1 OUTLET, IVORY
74960	SURFACE MOUNT FRAME (SCREW MOUNT), 2 OUTLETS, IVORY
74910	WALL BOX (2x4) MOUNT, 1 OUTLET, IVORY
74920	WALL BOX (2x4) MOUNT, 2 OUTLETS, IVORY
74925	WALL BOX (4x4) MOUNT, 4 OUTLETS, IVORY
58206	POWER STRIP, 6 OUTLETS, IVORY
58206-C14	POWER STRIP, 6 OUTLETS, C-14 INLET, IVORY
58206-C14-USB	POWER STRIP, 4 OUTLETS, 2 USB, C-14 INLET, IVORY
58205	POWER STRIP, 5 OUTLETS, IVORY
58205-C14	POWER STRIP, 5 OUTLETS, C-14 INLET, IVORY
58204-C14	POWER STRIP, 4 OUTLETS, C-14 INLET, BLACK
58208-C14	POWER STRIP, 8 OUTLETS, C-14 INLET, BLACK


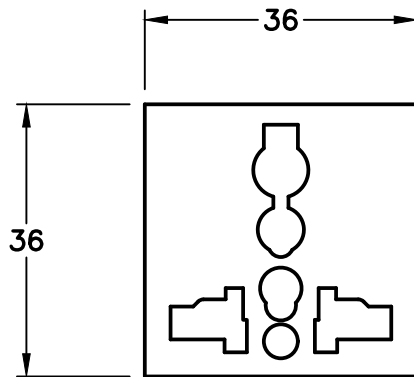


FRONT VIEW

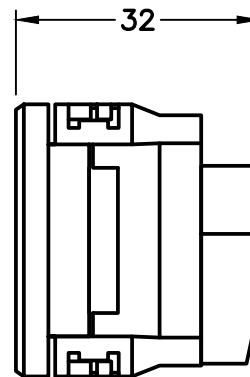

SIDE VIEW

OUTLETS (SOCKETS) ACCEPT MALE PLUG TYPES NOTED BELOW
























IMPORTANT:

THE "MAXIMUM" RATING OF 74900 IS 20 AMPERE 250 VOLT.

*RECEPTACLE DOES NOT PROVIDE GROUNDED CONNECTION WHEN EU1-16P AND FR1-16P 3-WIRE GROUNDING PLUGS ARE USED.

USE 74900-SGA (SEE PAGE 3) OR 30140-BLK (SEE PAGE 4) TO ACHIEVE GROUNDED CONNECTION.

PLUG TYPES

							
NEMA 1-15P / 15A-125V	NEMA 5-15P / 15A-125V	NEMA 5-20P / 20A-125V	NEMA 6-15P / 15A-250V	NEMA 6-20P / 20A-250V	AR1-10P / 10A-250V	AU1-10P / 10A-250V	AU2-15P / 15A-250V
							
BR2-10P / 10A-250V	BR3-10P / 20A-250V	CH1-10P / 10A-250V	DE1-13P / 16A-250V	*EU1-16P / 16A-250V	EUROPLUG / 4.0 MM PINS	IS1-16P / 16A-250V	IT1-10P / 10A-250V
					CONFIGURATION IDENTIFICATIONS		CONFIGURATION IDENTIFICATIONS
SA1-16P / 16A-250V	SW1-10P / 10A-250V	TH1-16P / 16A-250V	UK1-13P / 13A-250V	UK3-5P / 5/6A-250V	AR = ARGENTINA AU = AUSTRALIA/NEW ZEALAND CH = CHINA DE = DENMARK EU = EUROPEAN "SCHUKO"/GERMANY EU/FR = FRANCE IS = ISRAEL IT = ITALY/CHILE		NEMA = USA/CANADA/MEXICO SA = SOUTH AFRICA SW = SWITZERLAND TH = THAILAND UK = HONG KONG UK = SAUDI ARABIA/GULF STATES UK = S. AFRICA/INDIA UK = UNITED KINGDOM/IRELAND

CAT. No.

74900-SGA





ADD-ON ADAPTER FOR EUROPEAN, GERMAN, FRENCH CEE 7/7, 7/4 SCHUKO 16 AMPERE 250 VOLT PLUGS WHEN PLUGS ARE MATED WITH "UNIVERSAL" MULTI-CONFIGURATION POWER STRIPS, SOCKETS. ADD-ON ADAPTER PROVIDES "EARTH" GROUNDING CONNECTION.

NOTE:


- 1) CAUTION: FOR INSTALLATION AND USE BY QUALIFIED PERSONNEL ONLY.
- 2) INSTALL ADAPTER ON SCHUKO PLUG FIRST. ALIGN AND INSERT PLUG ADAPTER "GROUNDING EARTH PIN" INTO THE UNIVERSAL RECEPTACLE "GROUNDING" EARTH CONTACT ONLY AS INDICATED BELOW, STEPS 1, 2, 3.
- 3) SECONDARY OPTION: USE ADAPTER #30140-BLK IN PLACE OF 74900-SGA

PAGE 3 OF 4

ALL DIMENSIONS ARE IN MILLIMETERS

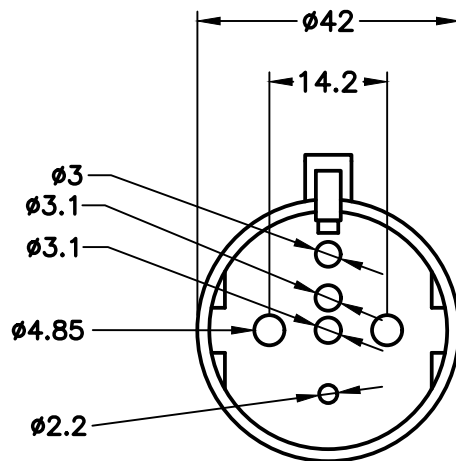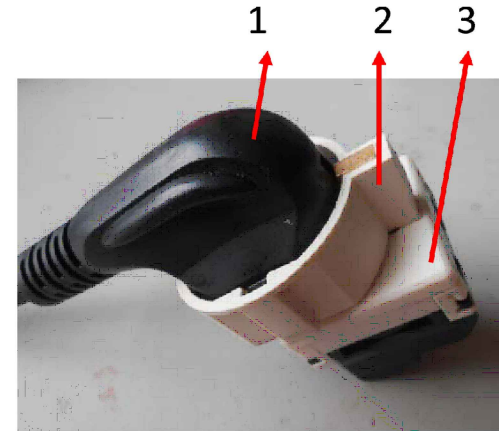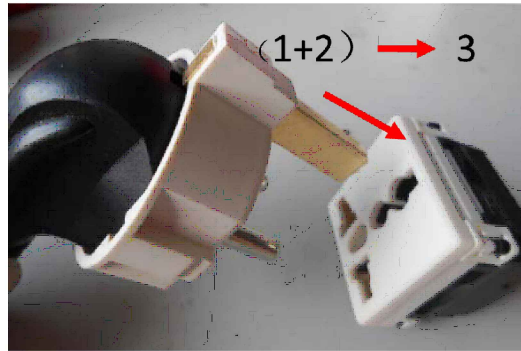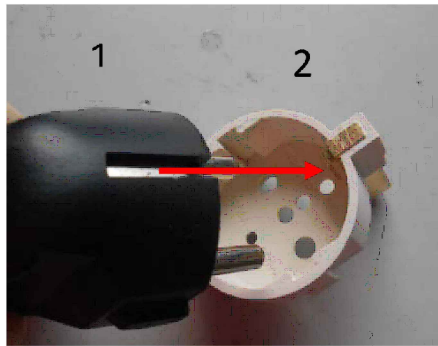

FRONT VIEW

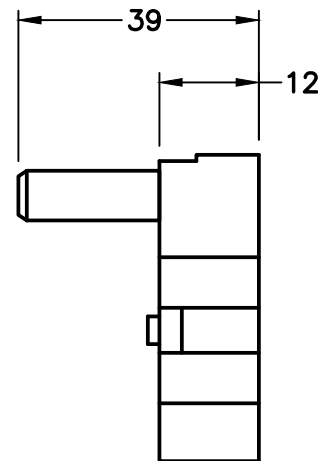

SIDE VIEW

CAT. No.

30140-BLK

BRITISH, UNITED KINGDOM 13 AMPERE 250 VOLT TYPE G PLUG ADAPTER. MATES SCHUKO, GERMAN, FRENCH, EUROPEAN CEE, CEE 7/4, CEE 7/7, CEE 7/16 (EU1-16P) PLUGS TO BRITISH BS 1363A (UK1-13R) POWER OUTLETS, 2 POLE-3 WIRE GROUNDING (2P+E), 13 AMPERE BS 1362 FUSE. BLACK.

CERTIFICATIONS


CE

STANDARDS


CEE 7/7 CEE 7/16 CEE 7/17 BS 1363A BS 1363 BS 1362 DIN 49440/49441

PAGE 4 OF 4


ALL DIMENSIONS ARE IN MILLIMETERS

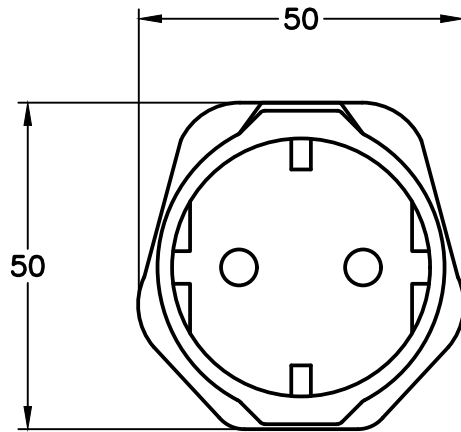

EU1-16P
FRONT VIEW

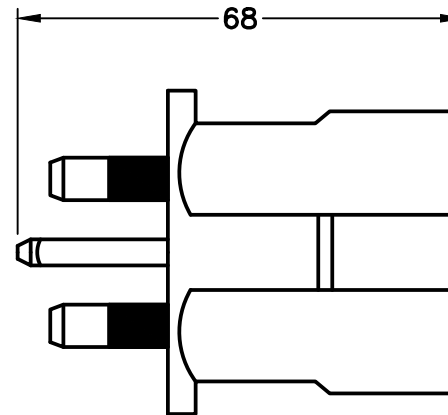


TOP VIEW

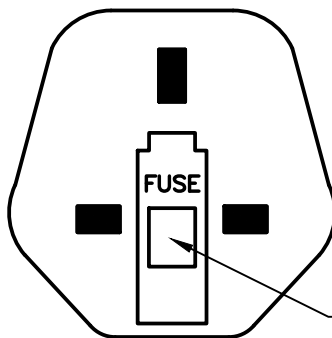

UK1-13P
BACK VIEW

CHANGEABLE
13 AMP FUSE

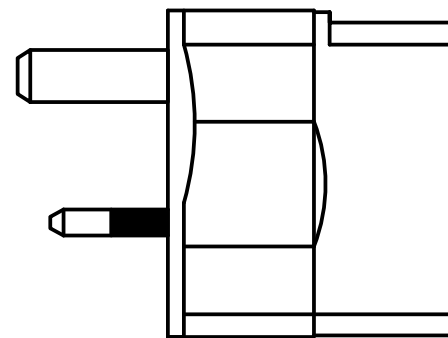

SIDE VIEW