


# INTERNATIONAL



## ***MULTIPLE OUTLET STRIPS***

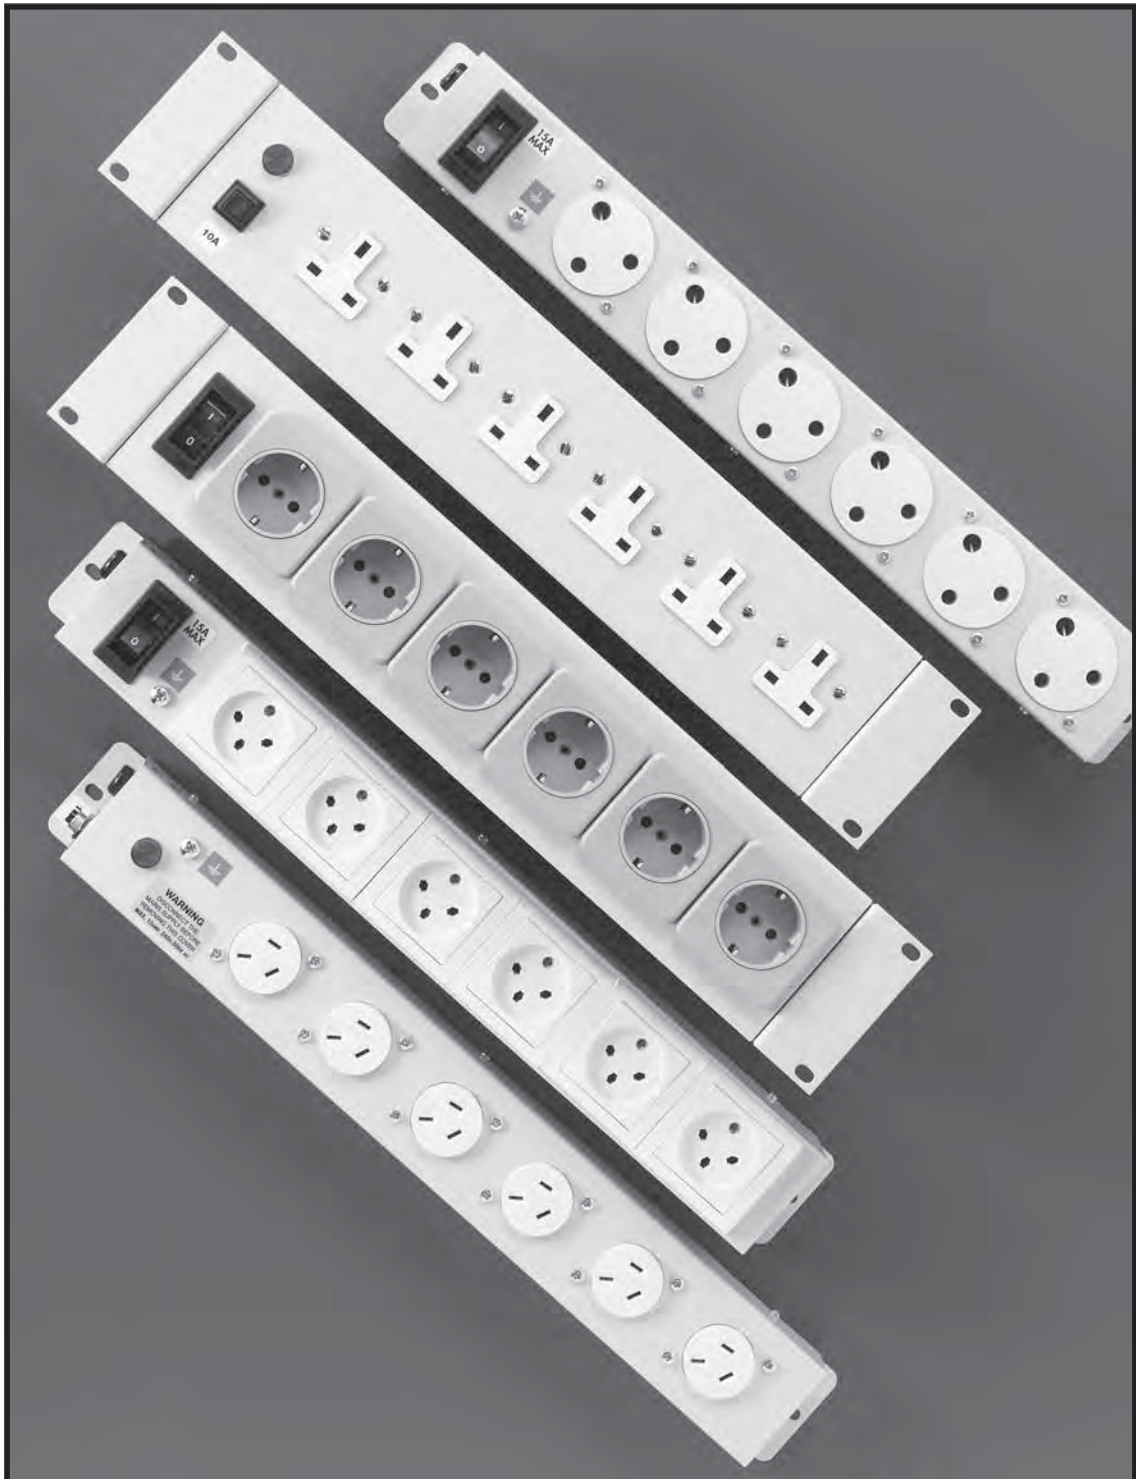

© 2004 International Configurations, Inc. Entire contents of this catalog copyrighted. [www.InternationalConfig.com](http://www.InternationalConfig.com)



International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985 101

# VERTICAL RACK MOUNT OR SURFACE MOUNT

(HEAVY DUTY)

## Multiple Outlet Power Strips

2 Pole 3 Wire Grounding, "CE" MARK

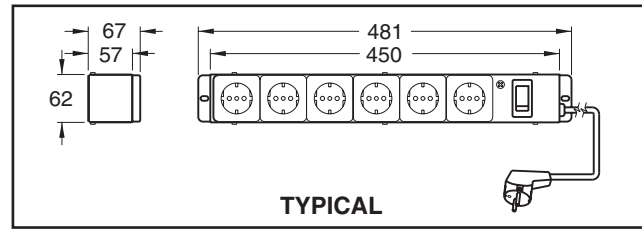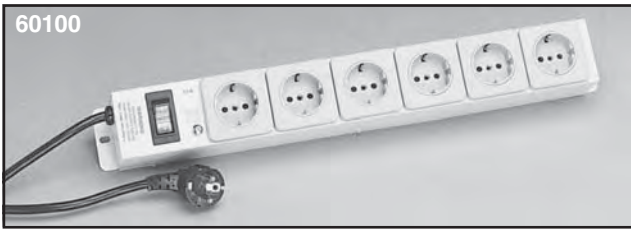

### General Specification Data

Heavy duty steel enclosure, painted gray.  
Two meter long 1.5 mm<sup>2</sup> cord with matching plug.  
Double pole illuminated circuit breakers.

### Technical Data

Receptacles meet applicable VDE, BS 1363, UTE, SEV, Dept. of Fair Trading, CEI, IMQ, UL or CSA standards.  
Test standard: BS 3456, manufactured to BS 5733  
"CE" mark

Receptacle / Plug Configuration		Catalog Number	Description
Receptacle	Plug		
EU1-16R	EU1-16P	60100	<b>6 European CEE 7, DIN 49440 "SCHUKO" 16 ampere 250 volt receptacles.</b> 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
UK1-13R	UK1-13P	60150	<b>6 United Kingdom (BS 1363) 13 ampere 250 volt receptacles.</b> 2 meter long cord with fused 13 ampere U.K. plug. Illuminated double pole circuit breaker, 12 ampere.
FR1-16R	EU1-16P	60200	<b>6 French 16 ampere 250 volt receptacles.</b> 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
SW1-10R	SW1-10P	60250	<b>6 Swiss 10 ampere 250 volt receptacles.</b> 2 meter long cord with Swiss plug. Illuminated double pole circuit breaker, 10 ampere.
IT1-10R / IT2-16R	IT1-10P	60300	<b>6 Italian 10 ampere 250 volt receptacles.</b> 2 meter long cord with non-polarized 10 ampere 250 volt Italian plug. Illuminated double pole circuit breaker, 10 ampere.
AU1-10R	AU1-10P	60500	<b>6 Australian 10 ampere 250 volt receptacles.</b> 2 meter long cord with Australian plug. Illuminated double pole circuit breaker, 10 ampere.
NEMA 5-15R	NEMA 5-15P	60350	<b>6 NEMA 5-15R 15 ampere 125 volt receptacles.</b> 2 meter long cord with NEMA 5-15P plug. Illuminated double pole circuit breaker, 15 ampere.
NEMA 6-15R	NEMA 6-15P	60400	<b>6 NEMA 6-15R 15 ampere 250 volt receptacles.</b> 2 meter long cord with NEMA 6-15P plug. Illuminated double pole circuit breaker, 15 ampere.
IEC 60320 C-13	IEC 60320 C-14	60450	<b>8 IEC 60320 C-13 10 ampere 250 volt receptacles.</b> 2 meter long cord with IEC 60320 C-14 plug. Illuminated double pole circuit breaker, 10 ampere.
IEC 60320 C-19	IEC 60320 C-20	60550	<b>8 IEC 60320 C-19 16 ampere 250 volt receptacles.</b> 2 meter long cord with IEC 60320 C-20 plug. Illuminated double pole circuit breaker, 15 ampere.

**NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.**




# VERTICAL RACK MOUNT OR SURFACE MOUNT

(HEAVY DUTY)

## Multiple Outlet Power Strips

2 Pole 3 Wire Grounding, "CE" MARK

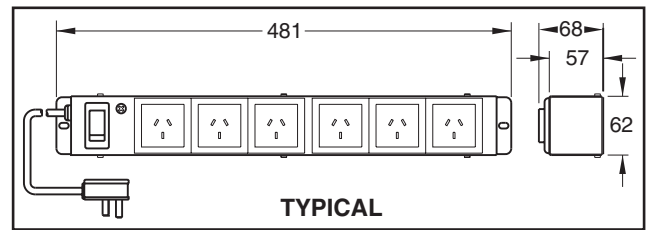











### General Specification Data


Heavy duty steel enclosure, painted gray.  
Two meter long 1.5 mm<sup>2</sup> cord with matching plug.  
Double pole illuminated circuit breakers.

### Technical Data

Receptacles meet applicable CCC, SII, BS 546A or AFSNIT standards.  
Test standard: BS 3456, manufactured to BS 5733  
"CE" mark

Receptacle / Plug Configuration		Catalog Number	Description
Receptacle	Plug		
 CH1-10R	 CH1-10P	60800	<b>6 Chinese 10 ampere 250 volt receptacles.</b> 2 meter long cord with 10 ampere 250 volt Chinese plug. Illuminated double pole circuit breaker, 10 ampere.
 CH2-16R	 CH2-16P	60900	<b>6 Chinese 16 ampere 250 volt receptacles.</b> 2 meter long cord with 16 ampere 250 volt Chinese plug. Illuminated double pole circuit breaker, 15 ampere.
 DE1-13R	 DE1-13P	60600	<b>6 Danish 13 ampere 250 volt receptacles.</b> 2 meter long cord with Danish plug. Illuminated double pole circuit breaker, 12 ampere.
 UK2-15R	 UK2-15P	60650	<b>6 United Kingdom (BS 546A) 15/16 ampere 250 volt receptacles.</b> 2 meter long cord with BS 546A plug. Illuminated double pole circuit breaker, 15 ampere.
 IS1-16R	 IS1-16P	60700	<b>6 Israeli 16 ampere 250 volt receptacles.</b> 2 meter long cord with Israeli plug. Illuminated double pole circuit breaker, 16 ampere.

## 12 outlet multi configuration power strip, brackets reversible for surface or rack mounting, 12 foot cord, 2.5 mm<sup>2</sup>, exits end cap of enclosure

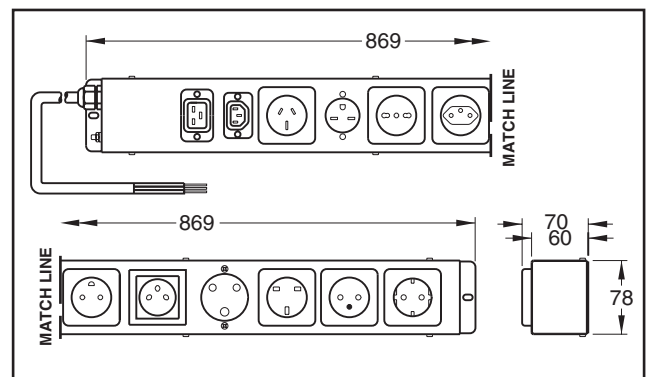

Receptacles - EU1-16R, FR1-16R, AU1-10R, AU2-15R, CH1-10R, UK1-13R, UK2-15R, IS1-16R, DE1-13R, SW1-10R, IT1-10R, IT2-16R, AR1-10R, NEMA 6-15R, IEC 60320 C-13, IEC 60320 C-19.

**NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.**





# 19" HORIZONTAL RACK MOUNT

(HEAVY DUTY)

## Multiple Outlet Power Strips

2 Pole 3 Wire Grounding, "CE" MARK

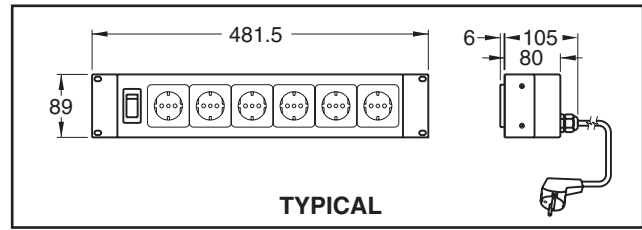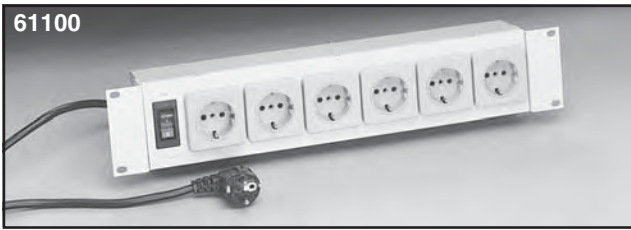

### General Specification Data

Heavy duty steel enclosure, painted gray.  
Two meter long 1.5 mm<sup>2</sup> cord with matching plug.  
Double pole illuminated circuit breakers.

### Technical Data

Receptacles meet applicable VDE, BS 1363, UTE, SEV, Dept. of Fair Trading, CEI, IMQ, UL or CSA standards.  
Test standard: BS 3456, manufactured to BS 5733  
"CE" mark

Receptacle / Plug Configuration		Catalog Number	Description
Receptacle	Plug		
EU1-16R	EU1-16P	61100	<b>6 European CEE 7, DIN 49440 "SCHUKO" 16 ampere 250 volt receptacles.</b> 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
UK1-13R	UK1-13P	61150	<b>6 United Kingdom (BS 1363) 13 ampere 250 volt receptacles.</b> 2 meter long cord with United Kingdom plug. Illuminated double pole circuit breaker, 12 ampere.
FR1-16R	EU1-16P	61200	<b>6 French 16 ampere 250 volt receptacles.</b> 2 meter long cord with non-polarized "SCHUKO" plug. Illuminated double pole circuit breaker, 15 ampere.
SW1-10R	SW1-10P	61250	<b>6 Swiss 10 ampere 250 volt receptacles.</b> 2 meter long cord with Swiss plug. Illuminated double pole circuit breaker, 10 ampere.
IT1-10R / IT2-16R	IT1-10P	61300	<b>6 Italian 10 ampere 250 volt receptacles.</b> 2 meter long cord with non-polarized 10 ampere 250 volt Italian plug. Illuminated double pole circuit breaker, 10 ampere.
AU1-10R	AU1-10P	61500	<b>6 Australian 10 ampere 250 volt receptacles.</b> 2 meter long cord with Australian plug. Illuminated double pole circuit breaker, 10 ampere.
NEMA 5-15R	NEMA 5-15P	61350	<b>6 NEMA 5-15R 15 ampere 125 volt receptacles.</b> 2 meter long cord with NEMA 5-15P plug. Illuminated double pole circuit breaker, 15 ampere.
NEMA 6-15R	NEMA 6-15P	61400	<b>6 NEMA 6-15R 15 ampere 250 volt receptacles.</b> 2 meter long cord with NEMA 6-15P plug. Illuminated double pole circuit breaker, 15 ampere.
IEC 60320 C-13	IEC 60320 C-14	61450	<b>8 IEC 60320 C-13 10 ampere 250 volt receptacles.</b> 2 meter long cord with IEC 60320 C-14 plug. Illuminated double pole circuit breaker, 10 ampere.
IEC 60320 C-19	IEC 60320 C-20	61550	<b>8 IEC 60320 C-19 16 ampere 250 volt receptacles.</b> 2 meter long cord with IEC 60320 C-20 plug. Illuminated double pole circuit breaker, 15 ampere.

**NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.**




# 19" HORIZONTAL RACK MOUNT

(HEAVY DUTY)

## Multiple Outlet Power Strips

2 Pole 3 Wire Grounding, "CE" MARK

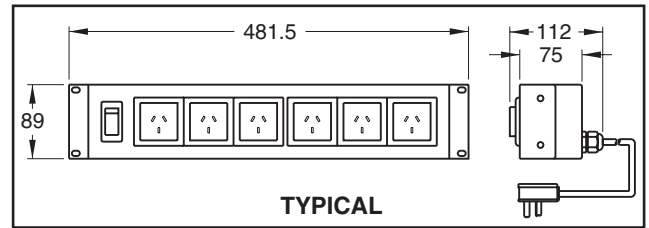

### General Specification Data

Heavy duty steel enclosure, painted gray.  
Two meter long 1.5 mm<sup>2</sup> cord with matching plug.  
Double pole illuminated circuit breakers.

### Technical Data

Receptacles meet applicable CCC, SII, BS 546A or AFSNIT standards.  
Test standard: BS 3456, manufactured to BS 5733  
"CE" mark

#### Receptacle / Plug Configuration

Receptacle Plug

#### Catalog Number


<b>CH1-10R</b>	<b>CH1-10P</b>
<b>CH2-16R</b>	<b>CH2-16P</b>
<b>DE1-13R</b>	<b>DE1-13P</b>
<b>UK2-15R</b>	<b>UK2-15P</b>
<b>IS1-16R</b>	<b>IS1-16P</b>

61800
61900
61600
61650
61700

#### Description

- 6 Chinese 10 ampere 250 volt receptacles.** 2 meter long cord with 10 ampere 250 volt Chinese plug.  
Illuminated double pole circuit breaker, 10 ampere.
- 6 Chinese 16 ampere 250 volt receptacles.** 2 meter long cord with 16 ampere 250 volt Chinese plug.  
Illuminated double pole circuit breaker, 15 ampere.
- 6 Danish 13 ampere 250 volt receptacles.** 2 meter long cord with Danish plug.  
Illuminated double pole circuit breaker, 12 ampere.
- 6 United Kingdom (BS 546A) 15/16 ampere 250 volt receptacles.** 2 meter long cord with BS 546A plug.  
Illuminated double pole circuit breaker, 15 ampere.
- 6 Israeli 16 ampere 250 volt receptacles.** 2 meter long cord with Israeli plug.  
Illuminated double pole circuit breaker, 16 ampere.

## 12 outlet multi configuration power strip, 4U high, brackets reversible for surface or 19" rack mounting, 12 foot cord, 2.5 mm<sup>2</sup>, exits bottom of enclosure

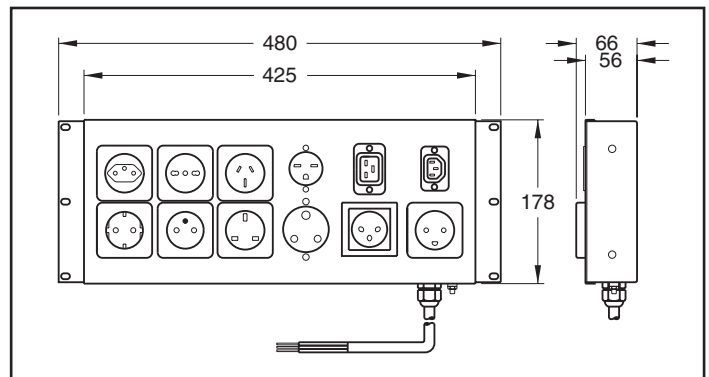

Receptacles - EU1-16R, FR1-16R, AU1-10R, AU2-15R, CH1-10R, UK1-13R, UK2-15R, IS1-16R, DE1-13R, SW1-10R, IT1-10R, IT2-16R, AR1-10R, NEMA 6-15R, IEC 60320 C-13, IEC 60320 C-19.


**NOTE: Variations are available including units with surge protection, RFI filters, GFCI (RCD) and special order combinations. Minimum lot quantity may apply to special variations.**





# EUROPEAN "SCHUKO" POWER STRIPS

## 2 Pole 3 Wire Grounding

16 Ampere 250 Volt (CEE-7, DIN 49440), "CE" MARK



EU1-16R

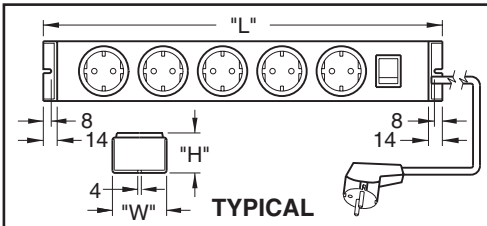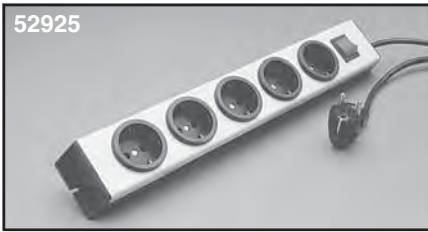

Description	"L"	"W"	"H"	Cat. No.
4 Outlet, without switch	315	60	44	<b>52904</b>
6 Outlet, without switch	433	60	44	<b>52906</b>
8 Outlet, without switch	553	60	44	<b>52908</b>
10 Outlet, without switch	673	60	44	<b>52910</b>
12 Outlet, without switch	793	60	44	<b>52912</b>
5 Outlet, with switch	403	60	44	<b>52925</b>
7 Outlet, with switch	523	60	44	<b>52927</b>
9 Outlet, with switch	643	60	44	<b>52929</b>
11 Outlet, with switch	763	60	44	<b>52931</b>
5 Outlet, with double pole	528	60	44	<b>52720*</b>
16 Ampere circuit breaker				

Approvals - VDE, OVE, KEMA, SEMKO, NEMKO, SETI  
Catalog No. 52720 - VDE, OVE.

### "CE" mark.

All units are supplied with 3 meters of 1.5 mm<sup>2</sup> cordage with non-polarized plug.

Units with switch have illuminated on / off rocker.

Color: Black base, silver cover. Cat. No. 52720 has orange cover.

All units accept "SCHUKO" CEE 7 and CEE 7-7 plugs.

All dimensions are in millimeters (1 mm = 0.039").

\* Available with 7 outlets (No. 52721) and 9 outlets (No. 52722).

**NOTE: Mating plugs are shown on page 60.**

## Surge Suppression / Filtered Strip

**Cat. No.** **Description**  
**52855** 5 Outlet with filter and surge protection, 6 ampere 230 volt, fused, on / off switch, 1.5 meters of 1.5 mm<sup>2</sup> cordage with non-polarized plug, black / silver color. VDE, OVE and GS approved.

"CE" mark.

**52855-A** Same as 52855 except rated 16 ampere 230 volt. Less fuse. 2 meter cord.

"CE" mark.

See page 225 for dimensional data.

## GFCI Outlet Strips

**Cat. No.** **Description**  
**52765-30** 5 Outlet with double pole GFCI circuit breaker, 30 mA trip level, 1.5 meters of 1.5 mm<sup>2</sup> cordage with non-polarized plug, black / orange color. VDE and OVE approved. "CE" mark.

**52765-10** Same as No. 52765-30 except with 10 mA trip level.

See page 224 for dimensional data.

## 19" Rack Mount Blank Plate

**Cat. No.** **Description**  
**52019** Blank plate. Gray. Designed for mounting short length power strips to 19" center to center racks.

See page 223 for dimensional data.

**NOTE: See pages 102-104 for rack mount series.**



# UNITED KINGDOM POWER STRIPS

## 2 Pole 3 Wire Grounding

13 Ampere 250 Volt (British Standard BS 1363A)



UK1-13R

Description	"L"	"W"	"H"	Cat. No.
5 Outlet, with switch	403	71.5	43.5	<b>52125</b>
6 Outlet, without switch	429	71.5	43.5	<b>52106</b>
6 Outlet, with switch	463	71.5	43.5	<b>52126</b>

All units are supplied with 1.5 meters of cord with fused 13 ampere BS 1363A plug.



Units with switch have illuminated on / off rocker.

Color: Black base, silver cover.

### "CE" mark.

All dimensions are in millimeters (1 mm = 0.039").

**NOTE: Mating plugs are shown on page 65.**

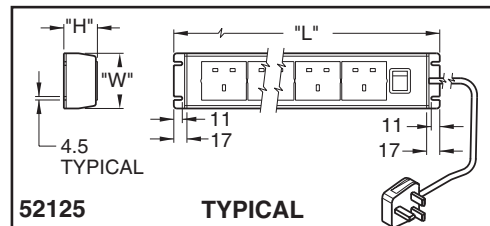
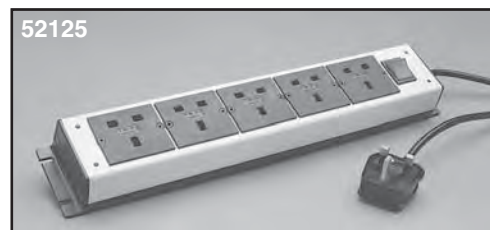


## Surge Suppression / Filtered Strip

**Cat. No.** **Description**  
**52150** 4 Outlet with filter and surge protection, 13 ampere 250 volt, fused, with neon indicator light. 2.5 meters of cord with fused BS 1363A plug. White.  
**"CE" mark**  
 All dimensions are in millimeters (1 mm = 0.039").

**52160** 6 Outlet with filter and surge protection, 13 ampere 250 volt, fused, with neon indicator light. 2.5 meters of cord with fused BS 1363A plug. White.  
**"CE" mark**

See page 223 for dimensional data.

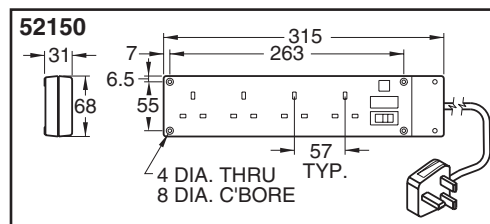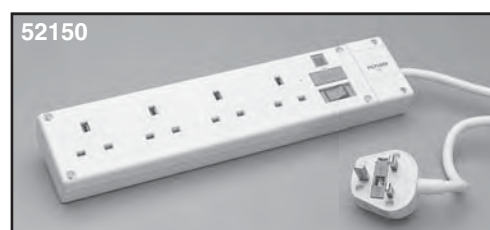


## Fused With Pilot Light

**Cat. No.** **Description**  
**52145** 4 Outlet, white. **Supplied without cord or plug.** Equipped with 13 ampere fuse and neon indicator.  
 All dimensions are in millimeters (1 mm = 0.039").


**52170** 4 Outlet, white. **Supplied with 2 meter cord and plug.** Equipped with 13 ampere fuse and neon indicator.

See page 223 for dimensional data.

**NOTE: See pages 102-104 for rack mount series.**

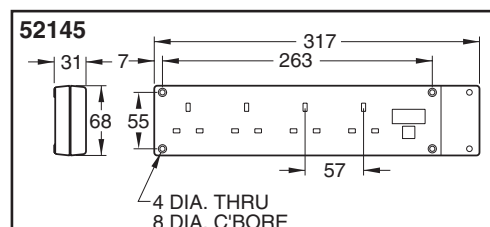

**FRENCH POWER STRIPS**  
**2 Pole 3 Wire Grounding**  
 16 Ampere 250 Volt, "CE" MARK

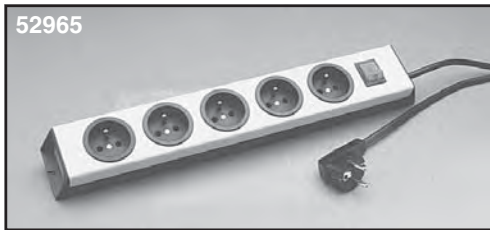

Description	"L"	"W"	"H"	Cat. No.
6 Outlet, without switch	433	60	44	52946
8 Outlet, without switch	553	60	44	52948
5 Outlet, with switch	403	60	44	52965*

Approval - UTE

"CE" mark.

All units are supplied with 3 meters of 1.5 mm<sup>2</sup> cordage with non-polarized plug.

Units with switch have illuminated on / off rocker.


Color: Black base, silver cover.

All units accept "SCHUKO" CEE 7-7 plugs.

All dimensions are in millimeters (1 mm = 0.039").



\* Available with filter and surge protection No. 52985

**NOTE: Mating plugs are shown on page 63.**

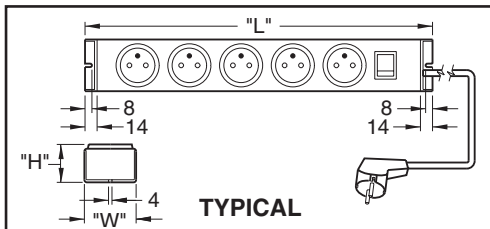

**NOTE: See pages 102-104 for rack mount series.**

**SWISS POWER STRIPS**  
**2 Pole 3 Wire Grounding**  
 10 Ampere 250 Volt (SEV 1011), "CE" MARK

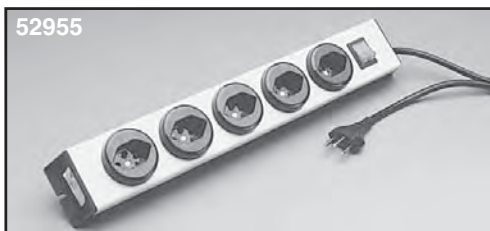

Description	"L"	"W"	"H"	Cat. No.
5 Outlet, with switch	403	60	50	52955
6 Outlet, without switch	433	60	50	55506

Approval - SEV

"CE" mark.


All units are supplied with 3 meters of 1.5 mm<sup>2</sup> cordage with plug.

Unit with switch has illuminated on / off rocker.

Color: Black base, silver cover.

All dimensions are in millimeters (1 mm = 0.039").

**NOTE: Mating plugs are shown on page 74.**

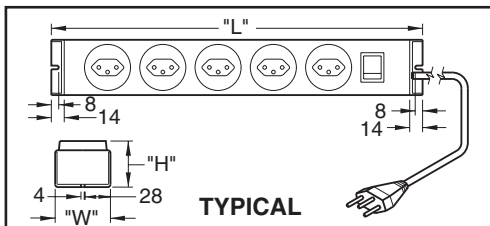

**NOTE: See pages 102-104 for rack mount series.**





# AUSTRALIAN POWER STRIPS


## 2 Pole 3 Wire Grounding

10 Ampere 250 Volt (AS / NZS 3112 1993)



Description	"L"	"W"	"H"	Cat. No.
6 Outlet, with circuit breaker	315	48	26.5	53326
8 Outlet, with circuit breaker	400	64	32.5	53328


Approval - EANSW  
 All units are supplied with 1 meter of cord with plug.  
 Color: White.  
 All dimensions are in millimeters (1 mm = 0.039").

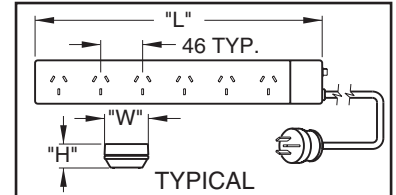

### Surge Suppression / Filtered Strip

Cat. No.	Description
53340	6 Outlet with suppression filter and surge protection, 10 ampere 250 volt, circuit breaker, 1 meter of cord with plug and neon indicator light. White.

**NOTE:** Mating plugs are shown on page 69.

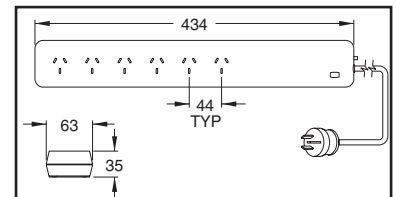

**NOTE:** See pages 102 - 104 for rack mount series.

# ISRAELI POWER STRIPS

## 2 Pole 3 Wire Grounding



16 Ampere 250 Volt (SI 32)



Cat. No.	Description
56125	5 Outlet, with switch.
56106	6 Outlet, without switch.

Approval - SII  
 All units are supplied with 1.5 meters of cord with plug.  
 Unit with switch has illuminated on / off push button.  
 Color: White  
 All dimensions are in millimeters (1 mm = 0.039").

**NOTE:** Mating plugs are shown on page 76.  
**NOTE:** See pages 102 - 104 for rack mount series.

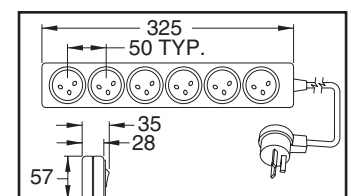

## ITALIAN POWER STRIPS

### 2 Pole 3 Wire Grounding



10/16 Ampere 250 Volt (CEI 23-16 / VII)



IT1-10R



IT2-16R



#### Cat. No.

**54406**

#### Description

6 Outlet dual configuration (accepts both 10 ampere and 16 ampere 250 volt plugs). White.

**54408**

8 Outlet dual configuration (accepts both 10 ampere and 16 ampere 250 volt plugs). White.

Approval - IMQ

Unit is supplied with 1.5 meters of cord with non-polarized 16 ampere 250 volt plug.

All dimensions are in millimeters (1 mm = 0.039").

**NOTE: Mating plugs are shown on pages 72 and 73.**

See pages 102-104 for rack mount series.

## DANISH POWER STRIPS

### 2 Pole 3 Wire Grounding


13 Ampere 250 Volt (AFSNIT 107-2-D1) Previously rated 10 Ampere 250 Volt



DE1-13R



"EDP"

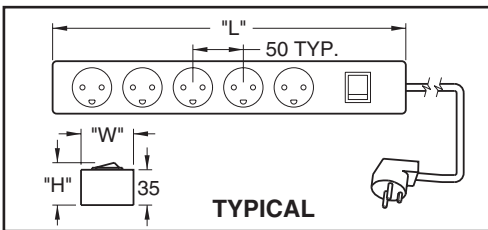

#### Description

5 Outlet, with on / off illuminated switch.

5 Outlet ("EDP" configuration), with on / off illuminated switch.

"L"

350

"W"

52

"H"

42

Cat. No.

**56205**

350

52

39

**56305**

Approval - DEMKO

All units are supplied with 1.5 meters of cord with plug.

Color: White.

All dimensions are in millimeters (1 mm = 0.039").


**NOTE: See pages 102-104 for rack mount series.**

**NOTE: "EDP" outlet configuration accepts "EDP" plugs only for use on dedicated data processing circuits. See page 77 for mating plugs.**

## COMBINATION POWER STRIPS

### 2 Pole 3 Wire Grounding

16 Ampere 250 Volt, "CE" MARK



EU1-16R




FR1-16R



UK1-13R



SW1-10R

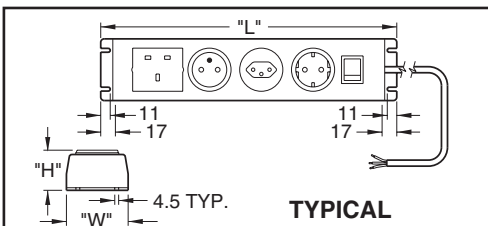

#### Description

4 Outlet

Euro, French, Swiss, U.K.

4 Outlet, with on / off switch

Euro, French, Swiss, U.K.

"L"

310

"W"

71.5

"H"

46.5

Cat. No.

**58104**

343

71.5

46.5

**58204**

Units are supplied with 1.5 meters of cord **less attachment plug.**

Color: Black base, silver cover.

"CE" mark.

All dimensions are in millimeters (1 mm = 0.039").



# JAPANESE POWER STRIP

## 2 Pole 3 Wire Grounding


15 Ampere 125 Volt (JIS 8303)



Cat. No.	Description
56504	4 Outlet. External grounding lug provides grounding for 2 pole 2 wire plugs with grounding lead. Gray.

Approvals - JET  
 Unit is supplied with 3 meters of cord with 15 ampere 125 volt plug.  
 All dimensions are in millimeters (1 mm = 0.039").

**NOTE: Mating plugs are shown on page 82.**

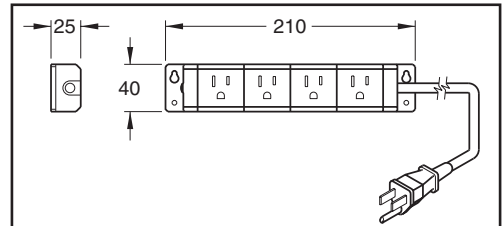


# IEC 60320 C-13 POWER STRIPS

## 2 Pole 3 Wire Grounding

10 Ampere 250 Volt, "CE" MARK



IEC 60320 C-13



Description	"L"	"W"	"H"	Cat. No.
4 Outlet, with fused inlet.	369	71.5	43.5	57104
6 Outlet, with fused inlet.	489	71.5	43.5	57106
8 Outlet, with fused inlet.	609	71.5	43.5	57108
4 Outlet, with switch and fused inlet.	403	71.5	51.5	57204
6 Outlet, with switch and fused inlet.	523	71.5	51.5	57206
8 Outlet, with switch and fused inlet.	643	71.5	51.5	57208

Input power is supplied through any American or International cord set with an IEC 60320 C-13 connector. See **pages 14-36** for mating cord sets and plugs. See pages 128-133 for rewirable plugs/connectors. Equipped with 10 ampere 250 volt replaceable fuse and spare fuse. Units with switch have illuminated on / off rocker. Color: Black base, silver cover. "CE" mark.

**NOTE: See pages 102-104 for rack mount series.**

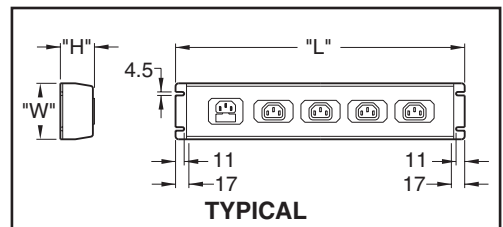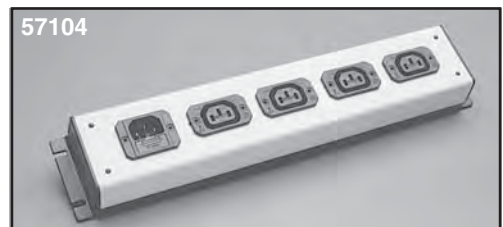

# UNITED KINGDOM POWER STRIP

## 2 Pole 3 Wire Grounding

15 Ampere 250 Volt (BS 546A), 16 Ampere 250 Volt (SABS 164)



Cat. No.	Description
52205	5 Outlet. Circuit breaker, pilot light and 2 foot long cord with plug. White. 15 ampere 250 volt. 2 pole 3 wire grounding. Approval: SABS See page 188 for dimensional data.

**NOTE: Mating plugs are shown on page 67.**


**NOTE: See pages 102-104 for rack mount series.**




# ARGENTINE POWER STRIP

## 2 Pole 3 Wire Grounding

10 Ampere 250 Volt



AR1-10R

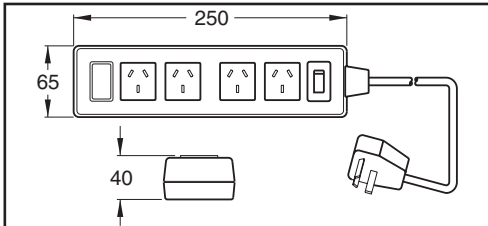

**Cat. No.**  
**84104**

**Description**

4 outlets with circuit breaker and pilot light. White.  
Five meter long cord with plug.

Approvals - IRAM

All dimensions are in millimeters (1 mm = 0.039").


**NOTE: Mating plugs are shown on page 78.**



# IEC 60320 C-13 TYPE

## Multiple Outlet Power Strips

2 Pole 3 Wire Grounding, "CE" MARK

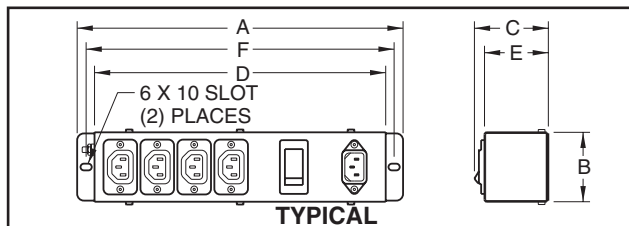

### General Specification Data

Heavy duty steel enclosure, painted gray.  
Illuminated double pole circuit breaker.  
Designed for use with IEC 60320 C-13 detachable cord sets and IEC 60320 C-14 jumper cords.

### Technical Data

IEC 60320 C-13 outlets. IEC 60320 C-14 inlets.  
Rated 10 ampere 250 volts AC. Shuttered contacts.  
Maximum current rating 10 ampere AC. "CE" mark.  
Test standard: BS 3456, manufactured to BS 5733.

### Description

- 4 outlet**, 10 ampere illuminated double pole circuit breaker.
- 6 outlet**, 10 ampere illuminated double pole circuit breaker.
- 8 outlet**, 10 ampere illuminated double pole circuit breaker.
- 4 outlet**, 10 ampere illuminated double pole circuit breaker, R.F. filter, surge protection.
- 6 outlet**, 10 ampere illuminated double pole circuit breaker, R.F. filter, surge protection.
- 8 outlet**, 10 ampere illuminated double pole circuit breaker, R.F. filter, surge protection.

### Catalog Number



- 62100
- 62150
- 62200
- 62250
- 62300
- 62350

### Dimensional Data (mm)

"A"	"B"	"C"	"D"	"E"	"F"
291	62	66	260	57	275
354	62	66	323	57	338
416	62	66	385	57	400
370	62	66	339	57	354
436	62	66	405	57	420
503	62	66	472	57	487

### R.F. FILTER TECHNICAL SPECIFICATION

Line frequency	0 to 400 Hz	The filters are fitted with ZNR voltage transients	
Operating voltage	115 to 250 volts a.c.	Standard spec. Z280G	
Rated current	10 amps	Max. cont. volts ac rms @ 25°C	320
Insulation resistance	6000M (100 volts d.c.)	Max. cont. volts dc @ 25°C	416
Leakage current	2x0.21 mA (250 volts 50 Hz)	Varistor V min @ 1mA	450
Typical attenuation	75 dB (100 kHz to 100 mHz)	Energy joules 10/1000	140
Earth choke	0.4 mH	Clamping volt @ 100 amps	825
Climatic category	IEC 68 25/85/21 DIN 40040	m watts cont.	800
Temperature range	-25°C to +85°C		

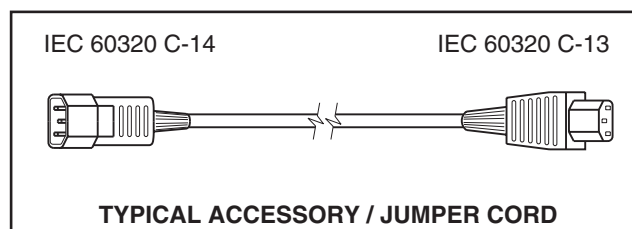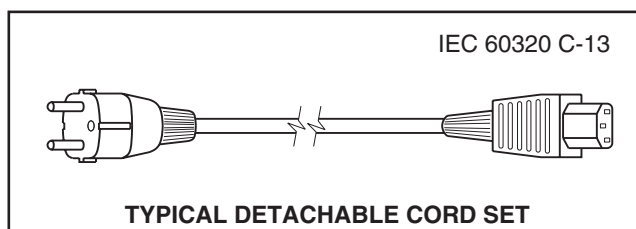

**NOTE: See pages 14 - 32 for a complete listing of international and domestic detachable cord sets.**



**NOTE: See pages 34 - 36 for a complete listing of accessory and jumper power cords.**



**IEC 60320 C-19 TYPE**  
**Multiple Outlet Power Strips**  
 2 Pole 3 Wire Grounding, "CE" MARK



IEC 60320 C-19

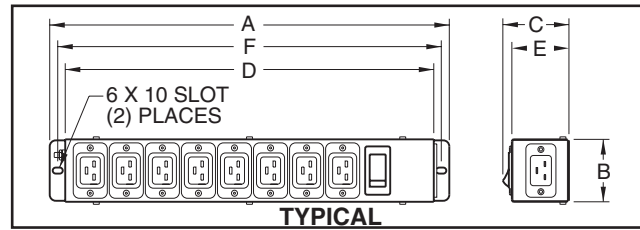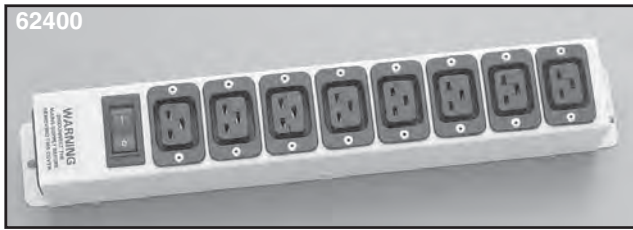

**General Specification Data**

Heavy duty steel enclosure, painted gray.  
 Illuminated double pole circuit breaker.  
 Designed for use with IEC 60320 C-19 detachable cord sets and IEC 60320 C-20 jumper cords.

**Technical Data**

IEC 60320 C-19 outlets. IEC 60320 C-20 inlet.  
 Rated 16 ampere 250 volts AC.  
**"CE" mark.**  
 Test standard: BS 3456, manufactured to BS 5733.

**Description**



**8 outlet**, 15 ampere illuminated double pole circuit breaker.

**Catalog Number**

62400

**Dimensional Data (mm)**

"A"	"B"	"C"	"D"	"E"	"F"
399	62	66	368	57	383

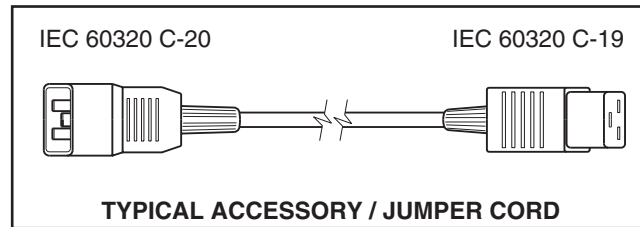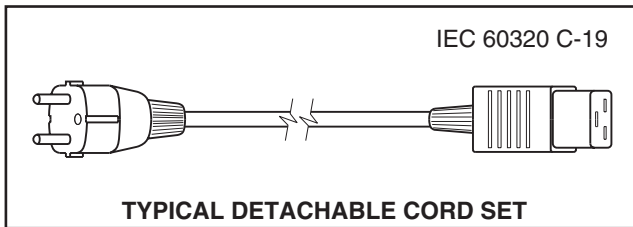

**NOTE:** See pages 14 - 32 for a complete listing of international and domestic detachable cord sets.

**NOTE:** See pages 38 and 39 for a complete listing of accessory and jumper power cords.

