CAT. No.	
57313X3.0M	IEC 60320 C–14 POWER INLET, 15 AMPERE 250 VOLT, SNAP–IN PANEL MOUNT FOR 3.0 mm THICK PANEL, 4.8 x 0.8 mm (0.189" x 0.032") QUICK CONNECT Q.D. TERMINALS, 2 POLE–3 WIRE GROUNDING, IP30 RATED, BLACK.

APPROVALS	C(RU)US ☑	ENEC 10 ☑	CCC ☑	VDE ☑		
CERTIFICATIONS	REACH ☑	ROHS ☑	ROHS2 (2011/65/EU) ☑	ROHS3 (2015/863, 2017/2012) ☑	CHINA ROHS ☑	CE ☑
STANDARDS	IEC 60320 C–14 ☑	IEC 60320–1 ☑	UL 60320–1 ☑	CSA C22.2 No. 60320–1 ☑		

DESCRIPTION:
PANEL MOUNT: SNAP–IN MOUNTING FROM FRONT SIDE
APPLIANCE INLET, PIN TEMPERATURE 70°C, PROTECTION CLASS I

ALL DIMENSIONS ARE IN MILLIMETERS

TECHNICAL DATA:

RATINGS IEC:	10A/250VAC; 50HZ
RATINGS UL/CSA	15A/250VAC; 60HZ
DIELECTRIC STRENGTH:	>2KVAC BETWEEN L–N >2KVAC BETWEEN L/N–PE (1MIN/50HZ)
ALLOWABLE OPERATION TEMP:	–25°C TO +70°C
DEGREE OF PROTECTION:	FROM FRONT SIDE IP30 ACC TO IEC 60529
PROTECTION CLASS:	SUITABLE FOR APPLIANCES WITH PROTECTION CLASS I ACC TO IEC 61140
MATERIAL, HOUSING:	THERMOPLASTIC, BLACK, UL 94V–0

ADDITIONAL SIZES:

CATALOG No	DESCRIPTION
57313X1.0M	1.0mm THICK PANELS
57313X1.2M	1.2mm THICK PANELS
57313	1.5mm THICK PANELS
57313X2.0M	2.0mm THICK PANELS
57313X2.5M	2.5mm THICK PANELS

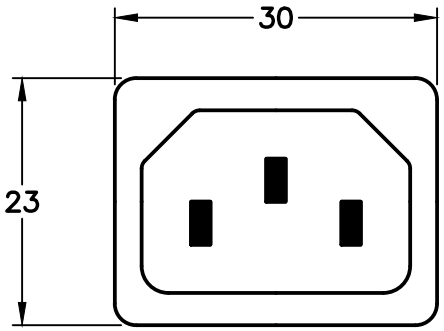

IEC 60320 C–14
FRONT VIEW

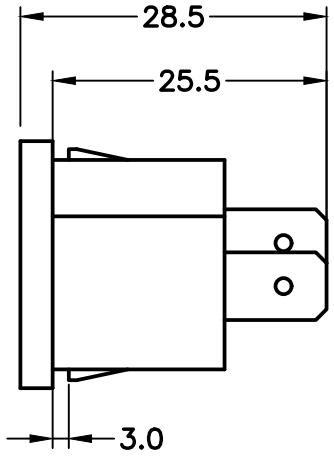

SIDE VIEW

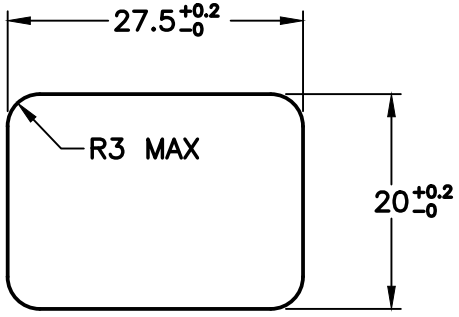

MOUNTING
DIMENSIONS

International Configurations, Inc. 210 Moody Rd., Enfield, Connecticut 06082 Tel: (860)749-6380 Fax: (860)749-2985
www.InternationalConfig.com sales@internationalconfig.com
Copyright 2021 International Configurations, Inc. All Rights Reserved ©