


INTERNATIONAL MODULAR WIRING DEVICES



International Configurations Inc's product range of "Country specific" modular wiring devices are designed for Worldwide construction projects, data centers, medical facilities, offshore platform environments, marine industry, mining sites, original equipment manufactured products and suitable for Industrial, Commercial and Residential applications. This modular device concept encompasses a multitude of international electrical components with snap in mount features and device interchangeability solutions.

Our modular group of devices includes international power outlets, switches, circuit breakers, GFCI modules, dimmers, pilot light indicators and Cat 6 products. Available mounting options include, panel mount frames, frames for mounting into 2X4 and 4X4 American wall boxes, surface or recessed European boxes, din rail and IP20, IP44, IP55, IP66 weatherproof enclosures.



© 2014 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985

INTERNATIONAL MODULAR DEVICES

E-mail: sales@internationalconfig.com

PRODUCT INSTALLATION GUIDE FOR PANEL MOUNTING

Web site: www.internationalconfig.com

The receptacles, switches and pilot lights identified in this catalog as “**Modular**” are designed for snap-in mounting to panels on electrical / electronic equipment. This concept allows for fast, easy production change-over when exporting products to various countries as a **standard** panel cutout will accept the receptacles used in each country. In addition, any combination or multiples of receptacles and switches can be ganged together as indicated on the cut-out calculation chart.


SNAP-IN FRAMES (BEZELS)

For mounting “**modular**” devices on panels from 1.0 to 3.0 mm thick
See calculation chart at bottom of page for panel cutout details




79110x45

Accepts one (1) 22.5 x 45 mm device






79100x45

Accepts one (1) 45 x 45 mm device
or
two (2) 22.5 x 45 mm devices

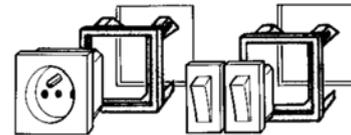


PANEL CUTOUT CALCULATION CHART

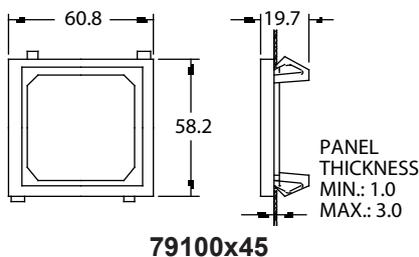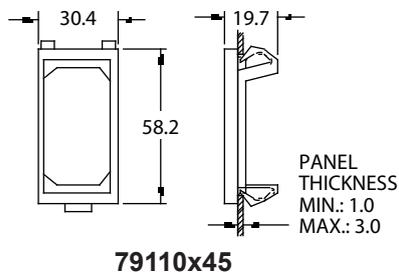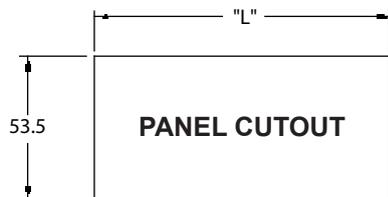

Cutout Calculation: Use the chart below to calculate the length (“L”) of the panel cutout required to install one or more “**modular**” devices.
All dimensions are in millimeters (1 mm = 0.039”)

		Number of 79100x45's to be installed into cutout								
		0	1	2	3	4	5	6	7	8
Number of 79110x45's to be installed into cutout	0		58.6	119	180	240.5	301.5	362.5	423	484
	1	28	88.5	149.5	210.5	271	332	392.5	453.5	
	2	58.5	119	180	240.5	301.5	362.5	423	484	
	3	88.5	149.5	210.5	271	332	392.5	453.5		
	4	119	180	240.5	301.5	362.5	423	484		
	5	149.5	210.5	271	332	392.5	453.5			
	6	180	240.5	301.5	362.5	423	484			
	7	210.5	271	332	392.5	453.5				
	8	240.5	301.5	362.5	423	484				
	9	271	332	392.5	453.5					
	10	301.5	362.5	423	484					
	11	332	392.5	453.5						
	12	362.5	423	484						
	13	392.5	453.5							
	14	423	484							
	15	453.5								

© 2014 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com



PRODUCT INSTALLATION GUIDE - INTERNATIONAL MODULAR DEVICES

Wall Box Mounting Frames & Plates


Frames & Plates Accept 22.5mm, 45mm & 67.5mm Devices

E-mail: sales@internationalconfig.com

Web site: www.internationalconfig.com

The receptacles, switches and pilot lights identified in this catalog as “Modular” are also designed to be mounted to standard American size wall boxes by using the support frames and wall plates indicated in the table below. This system for mounting “European” devices to American style boxes eliminates the need for special boxes and reduces cost and installation time.


TYPICAL EXAMPLE

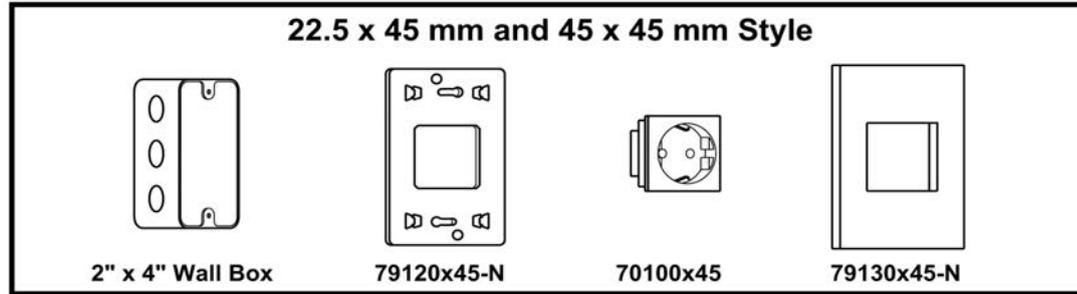

Screw Mounting to American Size Boxes

Modular Device Size	American Size Boxes	Support Frames	Wall Plates White	Wall Plates Stainless Steel
(1) 22.5 x 45 mm	 2" x 4"	 79170x45-N	 79140x45-N	 79145x45-N
(2) 22.5 x 45 mm or (1) 45 x 45 mm	 2" x 4"	 79120x45-N	 79130x45-N	 79135x45-N
(3) 22.5 x 45 mm or (1) 22.5 x 45 mm and (1) 45 x 45 mm or (1) 67.5 x 45 mm	 2" x 4"	 79170x45-N	 79180x45-N	 79185x45-N
(4) 22.5 x 45 mm or (2) 22.5 x 45 mm and (1) 45 x 45 mm or (2) 45 x 45 mm	 4" x 4"	 79210x45-N	 79220x45-N	 79225x45-N
(6) 22.5 x 45 mm or (2) 22.5 x 45 mm and (2) 45 x 45 mm or (2) 67.5 x 45 mm	 4" x 4"	 79275x45-N	 79285x45-N	 79295x45-N

NOTE: Outlets, frames and wall plates can be mounted on Wiremold® 3000 Series raceway using Wiremold® No. G3007C bracket.



INTERNATIONAL MODULAR COMPONENTS

2 Pole 3 Wire Grounding - 22.5mm, 45mm & 67.5mm

E-mail: sales@internationalconfig.com

Web site: www.internationalconfig.com

DEVICE OPTIONS

DEVICE SPECIFICATION DOCUMENTS AVAILABLE ON OUR WEBSITE




70100X45
European CEE 7
Schuko Outlet
16 Amp 250V
45x45mm



70100X45-BLK
European CEE 7
Schuko Outlet
16 Amp 250V
45x45mm



70100X45-RED
European CEE 7
Schuko Outlet
16 Amp 250V
45x45mm



70100X45-GRN
European CEE 7
Schuko Outlet
16 Amp 250V
45x45mm



70100X45-IT
European CEE 7 & CEI
23-16/VII Schuko/Italian
Outlet 10/16 Amp 250V
45x45mm



72100X45
United Kingdom BS1363A
Shuttered Outlet 13 Amp 250V
Magnesium Color Option
72100X45-BLK 45x45mm




72105X45
United Kingdom BS1363A
Switched & Shuttered Outlet
13 Amp 250V
67.5x45mm



71100X45
France & Belgium
CEE 7/5 Outlet
16 Amp 250V
45x45mm



74105X45
Australia & New Zealand
AS/NZS 3112 Outlet 10 Amp 250V
Magnesium Color Option
74105X45-BLK 45x45mm



74505X45
Australia & New Zealand
AS/NZS 3112 Outlet
15 Amp 250V
45x45mm



74900X45-W
International Multi-Configuration
Outlet 13A-250V & 15A-127V
Magnesium Color Option
74900X45 45x45mm




74700X45
China
GB1002/GB2099 Outlet
10 Amp 250V
45x45mm



74600X45
China
GB1002/GB2099 Outlet
16 Amp 250V
45x45mm



74705X45
China & European
GB1002/GB2099 Duplex Outlet
10 Amp 250V
67.5x45mm



73105X45
S. Africa, India and UK BS546
Multi-Configuration Outlet
16A-250V & 5A-250V
45x45mm



73100X45
S. Africa, India and UK
BS 546, SABS 164-1 & IA 16A3
Switched Outlet 16 Amp 250V
67.5x45mm



73310X45
S. Africa, India and UK
BS546 Outlet
5 Amp 250V
45x45mm



685041X45
Brazil
NBR 14136-2002 Outlet
10 Amp 250V
22.5x45mm




685042X45
Brazil
NBR 14136-2002 Outlet
20 Amp 250V
22.5x45mm




85100X45
Brazil NEMA 5-15R & CEI
7-16 Outlet
16A-250V & 15A-127V
45x45mm



85100X45D
Brazil NEMA 5-15R &
CEI 7-16 Duplex Outlet
16A-250V & 15A-127V
67.5x45mm




75100X45
Italy & Chile
CEI 16/VII Outlet
10 Amp 250V
22.5x45mm




75500X45
Italy & Chile CEI 16/VII
Multi-Configuration Outlet
10A-250V & 16A-250V
22.5x45mm



77100X45
Israel SI 32
Shuttered Outlet
16 Amp 250V
45x45mm



76100X45
Switzerland SEV 1011
Type 13 Outlet
10 Amp 250V
22.5x45mm



INTERNATIONAL MODULAR COMPONENTS

2 Pole 3 Wire Grounding - 22.5mm, 45mm & 67.5mm

E-mail: sales@internationalconfig.com

Web site: www.internationalconfig.com

DEVICE OPTIONS

DEVICE SPECIFICATION DOCUMENTS AVAILABLE ON OUR WEBSITE



76101X45
Switzerland SEV 1011 Type 13
Damp Locations Outlet
10 Amp 250V
45x45mm



76105X45
Switzerland SEV 1011
Type 23 Outlet
16 Amp 250V
45x45mm



77508X45
Denmark AFSNIT
107-2-D Outlet
13 Amp 250V
45x45mm



77509X45
Denmark AFSNIT
107-2-D EDP Outlet
13 Amp 250V
45x45mm



84100X45
Argentina
IRAM 1073 Outlet
10 Amp 250V
45x45mm



76143X45
North America & Japan NEMA 5-15
Outlet 15 Amp 125V 45x45mm.
Duplex Version **76143X45D**
45x67.5mm.



79510X45
Single Pole Switch
20 Amp 250V
22.5x45mm



79511X45
Single Pole Switch
20 Amp 250V
45x45mm



79520X45
3-Way Switch
20A 250V
22.5x45mm



79516X45
3-Way Switch
20 Amp 250V
45x45mm



79512X45
Double Pole Switch
20 Amp 250V
22.5x45mm



79514X45
Double Pole Switch
20 Amp 250V
45x45mm



79515X45
Double Pole 3-Way
Switch 20 Amp 250V
45x45mm



79513X45
Double Pole Switch 10
Amp 250V
45x45mm



79530X45
Indicator / Pilot Light
1 Watt 250 Volt
5 Color Options
22.5x45mm



79550X45
Dimmer Switch 40-400 Watt
100-240V 50/60Hz
For Incandescent & Halogen
45x45mm



74280X45
RJ45 & CAT6 Jack 22.5x45mm.
Available in 45x45mm
P/N **74344X45**.



79590X45
Blanking Plate. White.
Filler Size 22.5x45mm.



79591X45
Blanking Plate. White.
Filler Size 45x45mm.



74458X45
GFCI / MCB Combo 16A-230V
RCBO Circuit Breaker
10Ma Trip Level
45x45mm



74459X45
GFCI / MCB Combo 16A-230V
RCBO Circuit Breaker
30Ma Trip Level
45x45mm



74456X45
GFCI / MCB Combo 10A-230V
RCBO Circuit Breaker
10Ma Trip Level
45x45mm




74457X45
GFCI / MCB Combo 10A-230V
RCBO Circuit Breaker
30Ma Trip Level
45x45mm



74452X45
MCB 10A-230V 50/60Hz
1 Pole Plus Neutral
Circuit Breaker
22.5x45mm



74453X45
MCB 16A-230V 50/60Hz
1 Pole Plus Neutral
Circuit Breaker
45x45mm



© 2014 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985

INTERNATIONAL MODULAR COMPONENTS
Flush Mount, Surface Mount & Weatherproof

E-mail: sales@internationalconfig.com


Web site: www.internationalconfig.com

MOUNTING OPTIONS

DEVICE SPECIFICATION DOCUMENTS AVAILABLE ON OUR WEBSITE



79120X45-N
 Mounting Frame.
 Fits on USA 2x4 Boxes.
 Accepts 22.5x45mm &
 45x45mm Devices.




79130X45-N
 Finish Plate. White.
 Fits 79120X45-N Mounting Frame.
 Opening Size 45x45mm.



79135X45-N
 Finish Plate. Brushed Stainless Steel.
 Fits 79120X45-N Mounting Frame.
 Opening Size 45x45mm.




79170X45-N
 Mounting Frame.
 Fits on USA 2x4 Boxes.
 Accepts 22.5mm, 45mm &
 67.5mmx45mm Devices.



79180X45-N
 Finish Plate. White.
 Fits 79170X45-N Mounting Frame.
 Opening Size 67.5x45mm.




79185X45-N
 Finish Plate. Brushed Stainless Steel.
 Fits 79170X45-N Mounting Frame.
 Opening Size 67.5x45mm.




79140X45-N
 Finish Plate. White.
 Fits 79170X45-N Mounting Frame.
 Opening Size 22.5x45mm.




79145X45-N
 Finish Plate. Brushed Stainless Steel.
 Fits 79170X45-N Mounting Frame.
 Opening Size 22.5x45mm.




79210X45-N
 Mounting Frame.
 Fits on USA 4x4 Boxes.
 Accepts 22.5mm, 45mm &
 67.5mmx45mm Devices.




79220X45-N
 Finish Plate. White.
 Fits 79210X45-N Mounting Frame.
 Opening Size 90x45mm.



79225X45-N
 Finish Plate. Brushed Stainless Steel.
 Fits 79210X45-N Mounting Frame.
 Opening Size 90x45mm.



79275X45-N
 Mounting Frame.
 Fits on USA 4x4 Boxes.
 Accepts 22.5mm, 45mm &
 67.5mmx45mm Devices.



79285X45-N
 Finish Plate. White.
 Fits 79275X45-N Mounting Frame.
 Opening Sizes Two 67.5x45mm.



2X4
 Recessed Standard American
 2x4 Wall Box Examples.
 Use with 2x4 Mounting Frames
 and Wall Plates.



4X4
 Recessed Standard American
 4x4 Wall Box Examples.
 Use with 4x4 Mounting Frames
 and Wall Plates.



79420
 Surface Mount Standard American
 2x4 Wall Box. Cast Aluminum.
 1/2 inch NPT Entries. Use with 2x4
 Mounting Frames and Wall Plates.



79430
 Surface Mount Standard American
 4x4 Wall Box. Cast Aluminum.
 1/2 inch NPT Entries. Use with 4x4
 Mounting Frames and Wall Plates.



79240X45
 Surface Mount Metal Box.
 Gray. Accepts
 22.5x45mm Devices.



79235X45
 Surface Mount Metal Box.
 Gray. Accepts 22.5mm &
 45x45mm Devices.




79230X45
 Surface Mount Metal Box.
 Gray. Accepts 22.5mm &
 45x45mm Devices.
 Two Openings.




79280X45
 Surface Mount Metal Box.
 Gray. Accepts
 22.5mm, 45mm &
 67.5mmx45mm Devices.



79260X45-N
79250X45-N
79266X45-N
 Surface Mount Plastic Box, Frame
 & Plate. 22.5x45mm Opening.



72350
79250X45-N
79266X45-N
 Flush Mount Metal Box, Frame
 & Plate. 22.5x45mm Opening.



72350-F
79250X45-N
79266X45-N
 Flush Mount Plastic Box, Frame
 & Plate. 22.5x45mm Opening.



79260X45-N
79250X45-N
79265X45-N
 Surface Mount Plastic Box, Frame
 & Plate. 45x45mm Opening.



INTERNATIONAL MODULAR COMPONENTS


Flush Mount, Surface Mount & Weatherproof

E-mail: sales@internationalconfig.com


Web site: www.internationalconfig.com

MOUNTING OPTIONS

DEVICE SPECIFICATION DOCUMENTS AVAILABLE ON OUR WEBSITE



72350
79250X45-N
79265X45-N
Flush Mount Metal Box, Frame & Plate. 45x45mm Opening.




72350-F
79250X45-N
79265X45-N
Flush Mount Plastic Box, Frame & Plate. 45x45mm Opening.



79245X45-N
79270X45-N
79255X45-N
Surface Mount Plastic Box, Frame & Plate. Two 45x45mm Openings.




72355
79270X45-N
79255X45-N
Flush Mount Metal Box, Frame & Plate. Two 45x45mm Openings.



72355-F
79270X45-N
79255X45-N
Flush Mount Plastic Box, Frame & Plate. Two 45x45mm Openings.



79110X45
Snap-In Panel Mount Frame. White. Accepts 22.5x45mm Devices.



79100X45
Snap-In Panel Mount Frame. White. Accepts 22.5x45mm & 45x45mm Devices.



79595X45
Din Rail Mount Bracket. White. Accepts One 45x45mm Device.



79570X45
Weatherproof Cover. White. IP44. Wall Box or Panel Mount. Accepts 22.5x45mm & 45x45mm Devices.



680611X45CV
Weatherproof Cover. Gray. IP55. Panel Mount. Accepts 22.5x45mm Devices.



680612X45CV
Weatherproof Cover. Gray. IP55. Panel Mount. Accepts 22.5x45mm & 45x45mm Devices.



680611X45
Weatherproof Cover. Gray. IP55. Surface Mount with Box. Accepts 22.5x45mm Devices.



680612X45
Weatherproof Cover. Gray. IP55. Surface Mount with Box. Accepts 22.5x45mm & 45x45mm Devices.



68063X45
Weatherproof Cover. Gray. IP55. Panel Mount. Accepts 22.5mm, 45mm & 67.5mmx45mm Devices.



680635X45
Weatherproof Cover. Gray. IP55. Panel Mount. Accepts 22.5mm, 45mm & 67.5mmx45mm Devices. 90mmx45mm Opening.



680613X45
Weatherproof Cover & Box. Gray. IP55. Surface Mount. Accepts 22.5mm, 45mm & 67.5mmx45mm Devices.



680614X45
Weatherproof Cover & Box. Gray. IP55. Surface Mount. Accepts 22.5mm, 45mm & 67.5mmx45mm Devices. 90mmx45mm Opening.



684585X45
Weatherproof Cover. Gray. IP66. Panel Mount. Accepts 22.5mmx45mm & 45x45mm Devices.




684636X45
Weatherproof Cover & Box. Gray. IP66. Surface Mount. Accepts 22.5mmx45mm & 45x45mm Devices.



684638X45
Weatherproof Cover & Box. Gray. IP66. Surface Mount. Accepts 22.5mm, 45mm & 67.5mmx45mm Devices.



684628X45
Weatherproof Cover & Box. Gray. IP66. Surface Mount. Accepts 22.5mmx45mm & 45x45mm Devices. Two 45x45mm Openings.




79575X45
Weatherproof Cover. Flush or Panel Mount on 2-Gang American Wall Boxes. Accepts 22.5x45mm & 45x45mm Devices.



572071X45
USB Power Supply Charger, Single USB Socket, 5V-750mA. For recharging portable devices such as phones, smartphones, MP3 or MP4 players. 22.5x45mm.



572078X45
USB Power Supply Charger, Double USB Sockets, 5V-1500mA. For recharging portable devices such as phones, smartphones, tablets, PC, MP3 or MP4 players. 45x45mm.



© 2014 International Configurations, Inc. Entire contents of this catalog copyrighted. www.InternationalConfig.com

International Configurations, Inc. • P.O. Box 3374 • Enfield, Connecticut 06083 • TEL (860) 749-6380 • FAX (860) 749-2985

INTERNATIONAL MODULAR MOUNTING

2 Pole 3 Wire Grounding - 22.5mm, 45mm & 67.5mm

E-mail: sales@internationalconfig.com

Web site: www.internationalconfig.com

MOUNTING OPTIONS

DEVICE SPECIFICATION DOCUMENTS AVAILABLE ON OUR WEBSITE



69580X45
Modular Support Frame. Weatherproof Flip Lid. IP55. Accepts 22.5x45mm & 45x45mm Modular Devices.



69582X45
Modular Support Frame. IP20. Accepts 22.5x45mm & 45x45mm Modular Devices.




69651X45
Single Gang Surface Mount Box. IP55. Entry Glands. Accepts Frames 69580X45 and 69582X45.



69656X45
Single Gang Surface Mount Box. IP55. M20 Hub Entry. Accepts Frames 69580X45 and 69582X45.



69672X45
Two Gang Surface Mount Box. IP55. Entry Glands. Accepts Frames 69580X45 and 69582X45.



69678X45
Two Gang Surface Mount Box. IP55. M20 Hub Entries. Accepts Frames 69580X45 and 69582X45.




69661X45
Two Gang Vertical Surface Mount Box. IP55. Entry Glands. Accepts Frames 69580X45 and 69582X45.




69668X45
Two Gang Vertical Surface Mount Box. IP55. M20 Hub Entries. Accepts Frames 69580X45 and 69582X45.



69680X45
Triple Gang Surface Mount Box. IP55. Entry Glands. Accepts Frames 69580X45 and 69582X45.




69681X45
Single Gang Panel Mount Frame. IP55. Accepts Frames 69580X45 & 69582X45.



69683X45
Two Gang Horizontal Panel Mount Frame. IP55. Accepts Frames 69580X45 & 69582X45.



69685X45
Two Gang Vertical Panel Mount Frame. IP55. Accepts Frames 69580X45 & 69582X45.



69687X45
Triple Gang Horizontal Panel Mount Frame. IP55. Accepts Frames 69580X45 & 69582X45.



01614
M20 Threaded Adapter with O-Ring Gasket. Converts M20 Thread to 1/2 Inch National Pipe Thread.



01620
M20 Threaded Entry Hole Closure Plug with O-Ring Gasket.

MULTI-CONFIGURATIONS DEVICES

PRODUCT PRINTS AVAILABLE ON OUR WEBSITE



74900
International Multi-Configuration Outlet. 20 Amp-250 Volt Rated.



74910
Single Outlet Mounting Frame & Finish Plate for 2X4 American Boxes. Accepts "Only" 74900 & 74900-BLK.



74920
Dual Outlet Mounting Frame & Finish Plate for 2X4 American Boxes. Accepts "Only" 74900 & 74900-BLK.




74930
Single Outlet Panel Mount Frame. Accepts "Only" 74900 & 74900-BLK.



74940
Dual Outlet Panel Mount Frame. Accepts "Only" 74900 & 74900-BLK.



74950
Single Outlet Surface Mount Frame. Accepts "Only" 74900 & 74900-BLK.

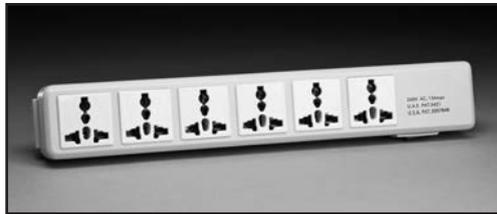

58206 / 58206-C14
Six Outlet Multi-Configuration Power Strips. View Prints on our Website and Select the Appropriate Detachable Power Supply Cord. Item 58206-C14 Produced with C-14 Inlet.



58205 / 58205-C14
Five Outlet Multi-Configuration Power Strips. View Prints on our Website and Select the Appropriate Detachable Power Supply Cord. Item 58205-C14 Produced with C-14 Inlet.

