

CAT. No.

84230-BLK


ARGENTINA 10 AMPERE 250 VOLT PLUG TYPE I (AR1-10P), 2 POLE-3 WIRE GROUNDING (2P+E), O.D. CORD GRIP = 8mm (0.315") DIA., BLACK.

APPROVALS	IRAM <input checked="" type="checkbox"/>
CERTIFICATIONS	REPUBLICA ARGENTINA (S) MARK <input checked="" type="checkbox"/>
STANDARDS	IRAM 2073 <input checked="" type="checkbox"/>


MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 7 DIA (0.276")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION


CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	35	7
BLUE	NEUTRAL	35	7
BROWN	LINE	35	7

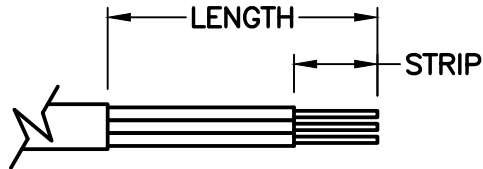

CORDAGE PREPARATION

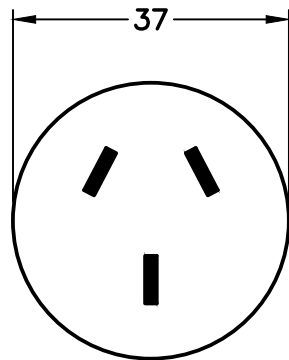

FRONT VIEW

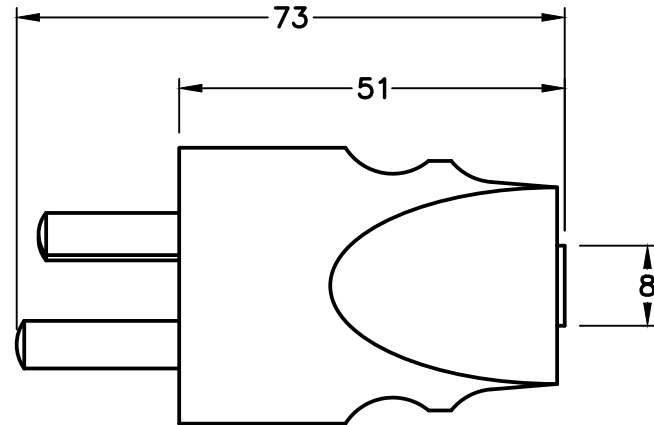

SIDE VIEW

ALL DIMENSIONS ARE IN MILLIMETERS

RELATED PRODUCTS:

PART No	DESCRIPTION
84250	ANGLE PLUG, WHITE
84250-BLK	ANGLE PLUG, BLACK
84230	STRAIGHT PLUG, WHITE
84260-BLK	CONNECTOR BODY
84261	CORDSET, C-13
84240	POWER CORD