

CAT. No.

74901-515U

INTERNATIONAL MULTI-CONFIGURATION 10 AMPERE 250 VOLT TYPE A, B, I, O, MODULAR OUTLET, 36mmX36mm SIZE, 2 POLE-3 WIRE GROUNDING (2P+E). IVORY.

CERTIFICATIONS

REACH ROHS3 CE

STANDARDS

INTERNATIONAL


ALL DIMENSIONS ARE IN MILLIMETERS

NOTE:


1. RECOMMENDED: SOLID WIRE $\phi 1.6 \sim 2.0$ OR MULTI-STRAND TINNED WIRE $2.0\text{mm}^2 \sim 3.5\text{mm}^2$.
2. OUTLET ACCEPTS AMERICAN (NEMA 5-15P), CHINA (CH1-10P), AUSTRALIA (AU1-10P), ARGENTINA (*AR1-10P) PLUGS (2P&E) AND (2P) NON-GROUNDING AMERICAN, CHINA, EUROPEAN, AUSTRALIAN, *ARGENTINA PLUGS.
3. *ARGENTINA PLUGS HAVE A REVERSE "L/N" WIRING SEQUENCE. PLUG POLARITY MAY NOT BE MAINTAINED.
4. MOUNTS ON AMERICAN 2x4, 4x4 WALL BOXES OR PANEL MOUNT. SURFACE MOUNTS ON WALL BOXES #74225, #84225-AR.
5. MOUNTS IN "12", "3", "6", "9" CLOCK HOUR POSITIONS ON WALL PLATES/MOUNTING FRAMES.

RELATED PRODUCTS:

CATALOG No.	DESCRIPTION
74970-W	PANEL MOUNT FRAME (SNAP-IN), 1 OUTLET, IVORY
74930	PANEL MOUNT FRAME (SCREW MOUNT), 1 OUTLET, IVORY
74940	PANEL MOUNT FRAME (SCREW MOUNT), 2 OUTLETS, IVORY
74950	SURFACE MOUNT FRAME (SCREW MOUNT), 1 OUTLET, IVORY
74960	SURFACE MOUNT FRAME (SCREW MOUNT), 2 OUTLETS, IVORY
74910	WALL BOX (2x4) MOUNT, 1 OUTLET, IVORY
74920	WALL BOX (2x4) MOUNT, 2 OUTLETS, IVORY
74925	WALL BOX (4x4) MOUNT, 4 OUTLETS, IVORY
58206	POWER STRIP, 6 OUTLETS, IVORY
58206-C14	POWER STRIP, 6 OUTLETS, C-14 INLET, IVORY
58206-C14-USB	POWER STRIP, 4 OUTLETS, 2 USB, C-14 INLET, IVORY
58205	POWER STRIP, 5 OUTLETS, IVORY
58205-C14	POWER STRIP, 5 OUTLETS, C-14 INLET, IVORY
58204-C14	POWER STRIP, 4 OUTLETS, C-14 INLET, BLACK
58208-C14	POWER STRIP, 8 OUTLETS, C-14 INLET, BLACK

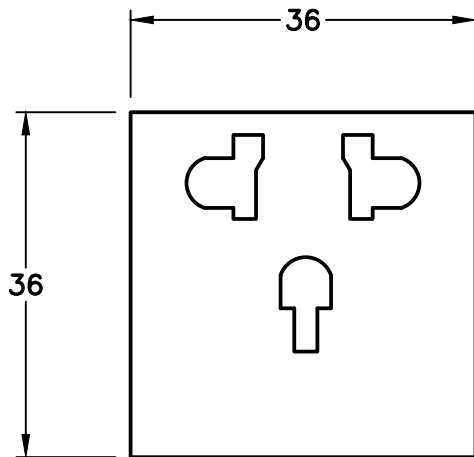

FRONT VIEW

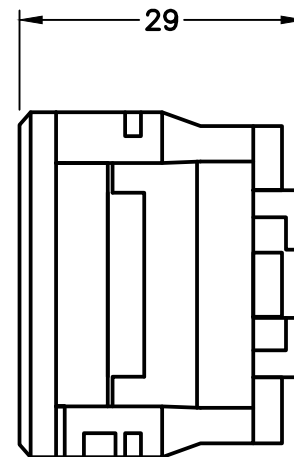

SIDE VIEW