

“SCHUKO” CEE7/7 EXTRA HARD DUTY PLUGS, CONNECTORS



INTERNATIONAL CONFIGURATIONS, INC.

P.O. BOX 3374 ENFIELD, CT 06083

TEL: 860-749-6380 FAX: 860-749-2985

WWW.INTERNATIONALCONFIG.COM

SALES@INTERNATIONALCONFIG.COM

BULLETIN #4152010

**“SCHUKO” CEE7/7 HARD DUTY, IMPACT RESISTANT
“T” RATED PLUGS & CONNECTORS. IP 44, IP20
RATED, 16A-250V, 2 POLE - 3 WIRE GROUNDING**

**DESIGNED FOR INDUSTRIAL, MARINE, MILITARY EQUIPMENT, EXTENSION CORDS
AND CONSTRUCTION SITES, AND OTHER HARD DUTY APPLICATIONS.**

PRODUCT FEATURES:

CONDUCTOR SIZE: MAXIMUM AWG / MM ACCEPTED = 4.0mm (12 AWG)


STRAIN RELIEF: MAXIMUM CORDAGE O.D. ACCEPTED = 11mm DIA. (0.433)

TERMINALS: CLAMP TYPE, PRESSURE PLATE.

TEMP RANGE: -25 DEGREE C + 45 DEGREE C.

CERTIFICATIONS: RoHS, CE MARK.

APPROVALS: VDE, OVE, CEBEC, FI, S, KEMA, UTE, NF APPROVALS.

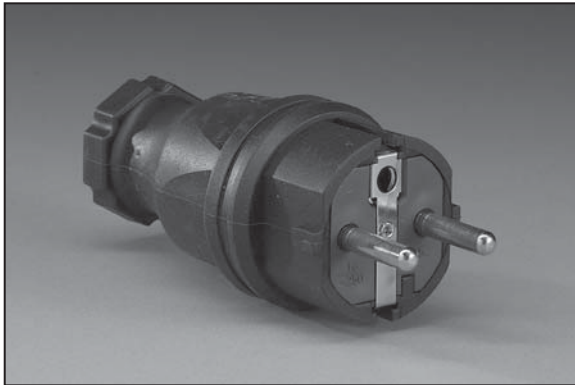

CAT. NO. 70141-HD
“SCHUKO” CEE 7/7 (EU1-16P)
16A-250V SPLASH PROOF PLUG.
IP 44 RATED, “T” IMPACT RATING.
2 POLE - 3 WIRE GROUNDING. BLACK.



CAT. NO. 70161-HD
“SCHUKO” CEE 7 (EU1-16R)
16A-250V CONNECTOR BODY.
IP 20 RATED, “T” IMPACT RATING.
2 POLE - 3 WIRE GROUNDING. BLACK.



CAT. NO. 70161-HDA
“SCHUKO” CEE 7 (EU1-16R) 16A-250V
SPLASH PROOF IP44 RATED CONNECTOR
BODY. “SNAP SHUT” CLOSURE COVER.
“T” IMPACT RATING, 2 POLE - 3 WIRE
GROUNDING. BLACK.



CAT. NO. 70161-HDB
“SCHUKO” CEE 7 (EU1-16R)
16A-250V SPLASH PROOF IP 44 RATED
CONNECTOR BODY. “FLIP LID” CLOSURE,
COVER. “T” IMPACT RATING.
2 POLE - 3 WIRE GROUNDING. BLACK.

International Configurations, Inc. P.O. Box 3374 Enfield, CT 06083
Sales@internationalconfig.com www.Internationalconfig.com

©copyright

Tel 860.749.6380 Fax: 860.749.2985